
















Pressacavi dritti maschio girevoli con filetto metallico disponibili nella versione con passo ISO metrico e PG. Prodotti in conformità alle norme CEI EN 61386-2-3 realizzati in poliammide (PA66) autoestinguenti secondo UL94. Antivibranti non apribili accidentalmente garantiscono un grado di protezione IP66 e con guarnizione interna IP67/68. Per lo smontaggio del raccordo dal tubo è necessario l'uso di un piccolo cacciavite, come meglio illustrato a pag. 4.














Manufactured according to CEI EN 61386-2-3 manufactured in poliammyde (PA66) self-extinguished according to UL94.

They are antivibrant not accidentally opening with an protection IP66 with gasket IP67/68. In order to disassemble fitting from conduit is necessary to use a little screwdriver, as better shown to page 4.

IP66

Codice Euro 2000	filetto ISO METRICO	Codice Euro 2000	filetto PG DIN 40430	Tubo NW	confezione pz.
P87010 	M16			10	10
P87012 	M16	P88012 	PG11	12	10
P87112 	M20	P88112 	PG16	12	10
P87017 	M20	P88017 	PG16	17	10
P87023 	M25	P88023 	PG21	23	10
P87029 	M32	P88029 	PG29	29	10
P87036 	M40			36	2
P87048 	M50			48	2

IP67/68


Codice Euro 2000	filetto ISO METRICO	Codice Euro 2000	filetto PG DIN 40430	Tubo NW	confezione pz.
P87510 	M16			10	10
P87512 	M16	P88512 	PG11	12	10
P87612 	M20	P88612 	PG16	12	10
P87517 	M20	P88517 	PG16	17	10
P87523 	M25	P88523 	PG21	23	10
P87529 	M32	P88529 	PG29	29	10
P87536 	M40			36	2
P87548 	M50			48	2

Dati tecnici
pagina 47
Technical items
page 47

Raccordi PA6 UL 94
Pressacavo 90° (IP66-IP67/68)
con filetto maschio in ottone



Fitting PA6 UL94
cable gland 90° (IP66-IP67/68)
with nickel plated thread

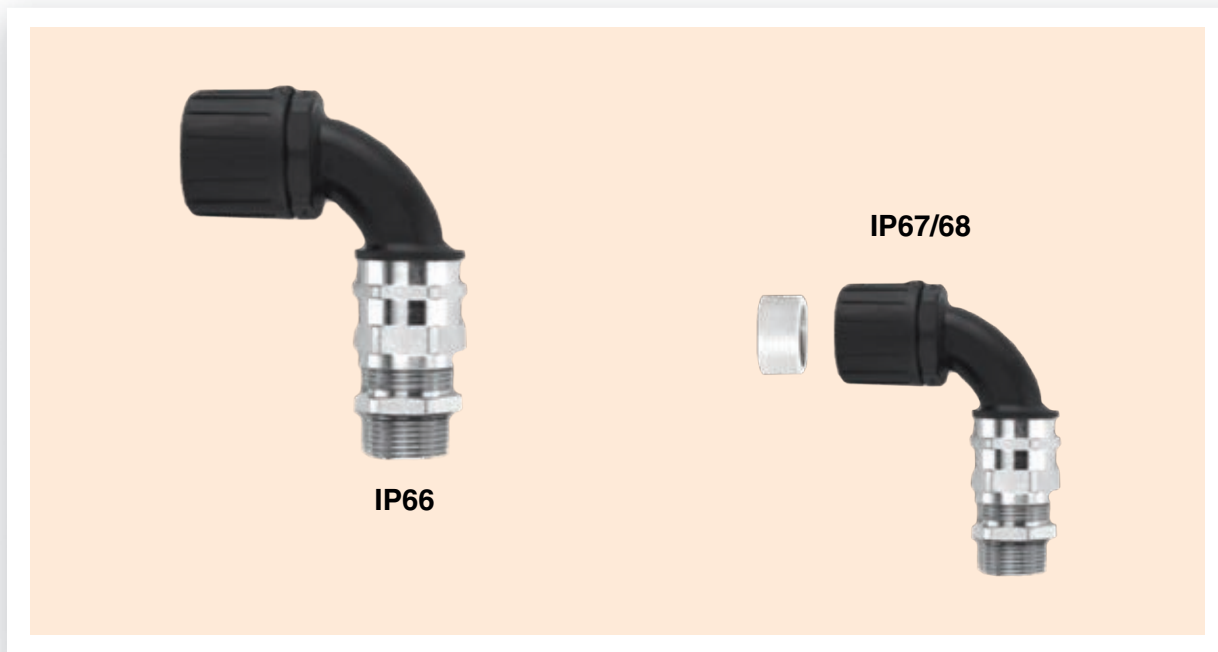

Pressacavi 90° maschio girevoli con filetto metallico disponibili nella versione con passo ISO metrico e PG. Prodotti in conformità alle norme CEI EN 61386-2-3 realizzati in poliammide (PA66) autoestinguenti secondo UL94. Antivibranti non apribili accidentalmente garantiscono un grado di protezione IP66 e con guarnizione interna IP67/68. Per lo smontaggio del raccordo dal tubo è necessario l'uso di un piccolo cacciavite, come meglio illustrato a pag. 4.

Manufactured according to CEI EN 61386-2-3 manufactured in poliammyde (PA66) self-extinguished according to UL94.

They are antivibrant not accidentally opening with an protection IP66 with gasket IP67/68. In order to disassemble fitting from conduit is necessary to use a little screwdriver, as better shown to page 4.

IP66

Codice Euro 2000	filetto ISO METRICO	Codice Euro 2000	filetto PG DIN 40430	Tubo NW	confezione pz.
P94010	M16			10	10
P94012	M16	P94312	PG11	12	10
P94112	M20	P94412	PG16	12	10
P94017	M20	P94317	PG16	17	10
P94023	M25	P94323	PG21	23	10
P94029	M32	P94329	PG29	29	10
P94036	M40			36	2
P94048	M50			48	2

IP67/68


Codice Euro 2000	filetto ISO METRICO	Codice Euro 2000	filetto PG DIN 40430	Tubo NW	confezione pz.
P94510	M16			10	10
P94512	M16	P94712	PG11	12	10
P94612	M20	P94812	PG16	12	10
P94517	M20	P94717	PG16	17	10
P94523	M25	P94723	PG21	23	10
P94529	M32	P94729	PG29	29	10
P94536	M40			36	2
P94548	M50			48	2

Dati tecnici
pagina 47
Technical items
page 47

Raccordi PA6 UL 94
Pressacavo 45° (IP66-IP67/68)
con filetto maschio in ottone



Fitting PA6 UL94
cable gland 45° (IP66-IP67/68)
with nickel plated thread

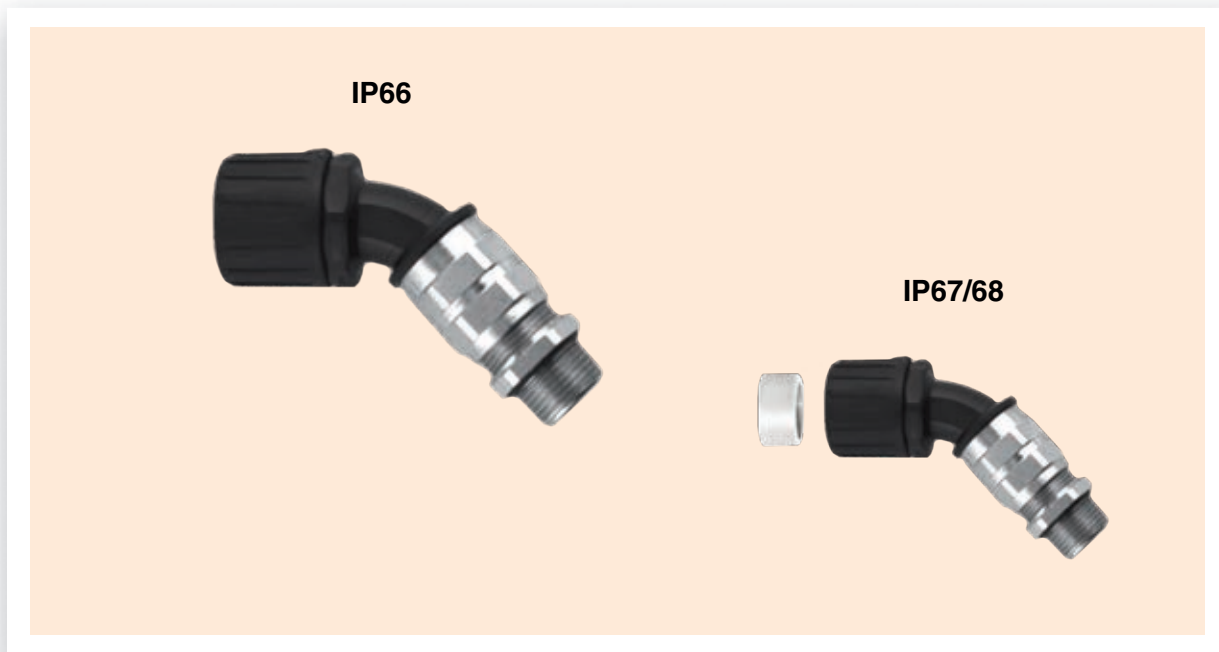

Pressacavi 45° maschio girevoli con filetto metallico disponibili nella versione con passo ISO metrico e PG. Prodotti in conformità alle norme CEI EN 61386-2-3 realizzati in poliammide (PA66) autoestinguenti secondo UL94. Antivibranti non apribili accidentalmente garantiscono un grado di protezione IP66 e con guarnizione interna IP67/68. Per lo smontaggio del raccordo dal tubo è necessario l'uso di un piccolo cacciavite, come meglio illustrato a pag. 4.

Manufactured according to CEI EN 61386-2-3 manufactured in poliammyde (PA66) self-extinguished according to UL94.

They are antivibrant not accidentally opening with an protection IP66 with gasket IP67/68. In order to disassemble fitting from conduit is necessary to use a little screwdriver, as better shown to page 4.

IP66

Codice Euro 2000	filetto ISO METRICO	Codice Euro 2000	filetto PG DIN 40430	Tubo NW	confezione pz.
P80310	M16			10	10
P80312	M16	P80112	PG11	12	10
P80412	M20	P80212	PG16	12	10
P80317	M20	P80217	PG16	17	10
P80323	M25	P80223	PG21	23	10
P80329	M32	P80229	PG29	29	10
P80336	M40			36	2
P80348	M50			48	2

IP67/68

Codice Euro 2000	filetto ISO METRICO	Codice Euro 2000	filetto PG DIN 40430	Tubo NW	confezione pz.
P80512	M16	P80812	PG11	12	10
P80612	M20	P80712	PG16	12	10
P80517	M20	P80717	PG16	17	10
P80523	M25	P80723	PG21	23	10
P80529	M32	P80729	PG29	29	10
P80536	M40			36	2
P80548	M50			48	2

Dati tecnici
pagina 47
Technical items
page 47



Raccordi in PA66 type "FPA-45-cable gland FPAX-45-cable gland" Flexicon